

PRODUCT 03 STARLINK + TELTONIKA · BONDED

Satellite + Cellular. Unbreakable connectivity.

Starlink Mini and an auto-aiming MIMO directional cellular antenna and Teltonika 5G router on a single integrated mast — bonded for true multi-path resilience with seamless satellite/cellular failover. Built for rural broadband, RV and vacation rentals, emergency response, and any site where a single link failure is unacceptable.

-  Bonded — not just failover
-  One install, two radios



ROTATOR KIT




POYNTING EPNT-2 V3



STARLINK MINI



TELTONIKA RUTM50

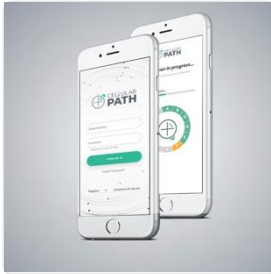

CELLULAR PATH APP

01 WHAT'S IN THE BUNDLE

- 01

Cellular Path Rotator Kit
Rotator, mounting hardware, 12V power adapter, 50 ft cable, and Hybrid Controller.
- 02

Poynting EPNT-2 V3
4x4 MIMO directional antenna with connector cables and RJ45 external adapters.
- 03

Starlink Mini
Compact Ku-band satellite terminal — mounts on the same Hybrid mast as the cellular rotator.
- 04

Teltonika RUTM50 5G Router
Bonding-ready router. Interchangeable with Peplink, Cradlepoint, or other compatible models.
- 05

Hybrid Mast Adapter Kit
Co-locates Starlink Mini + cellular rotator on one pole. Rooftop, RV, vehicle, trailer.
- 06

Pre-provisioned SIM or Dual SIM (optional)
Plug-and-play activation — no back-office call required on install day.

02 FEATURES & BENEFITS



Bonding & failover
Packets ride Starlink and cellular simultaneously — seamless satellite/cellular failover when one path drops.



iOS & Android App
Pair, scan, and lock peak cellular signal onsite. Monitor both paths and bonded throughput in one app.



Web Portal
Unified pane of glass — Starlink + cellular health, bonding status, alerts, and fleet view across every site.



Auto-aim cellular
12-point auto-scan picks the strongest tower, then re-aims remotely whenever the network shifts.

03 AT A GLANCE

PATHS
Starlink + Cellular
Bonded · simultaneous · failover

CELLULAR ANTENNA
MIMO 2x / 4x
Auto-aimed · directional

BUILT FOR
Rural · RV · Emergency
Vacation rentals · EOC · mobile command

ENVIRONMENT
-20 °F to 140 °F
IPx2 · 90 mph sustained

04 VERIFIED COMPATIBLE

SATELLITE

Starlink Mini

Starlink Standard

BONDING

Speedify

SDWAN

Bondix

ROUTER

Teltonika RUTM50

Teltonika RUTM20

MANAGE FROM

iOS App

Android App

Web Portal


QUOTE
CP-NMS-2026-01

CONFIGURATION
Hybrid SOCA · Teltonika

LEAD TIME
In stock · 5-7 business days

PRICING VALID
30 days from issue

01 SYSTEM ARCHITECTURE

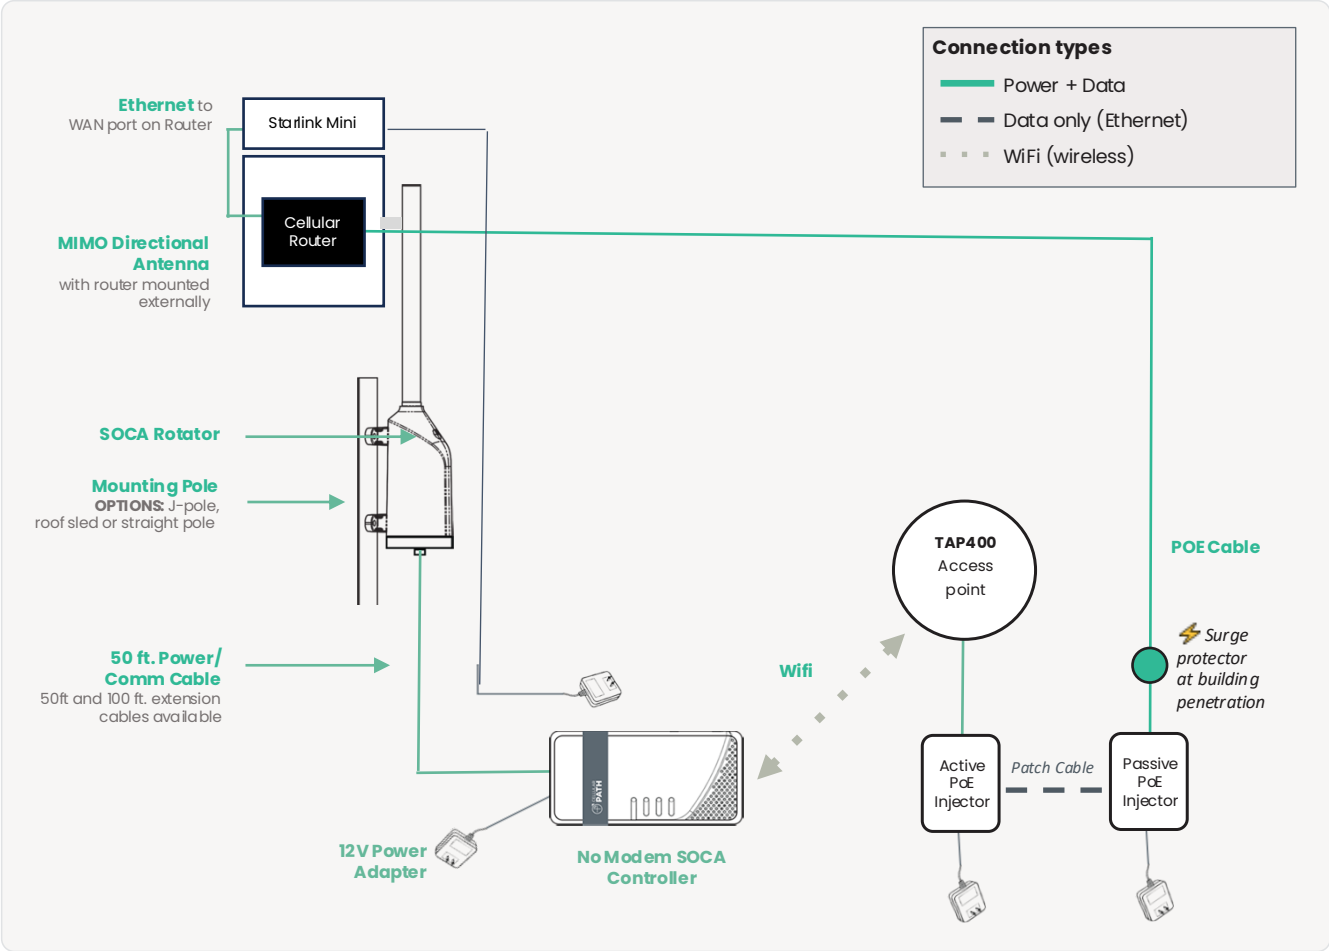

02 BILL OF MATERIALS & PRICING

#	PART / DESCRIPTION	QTY
01	SOCA-02 · No-Modem SOCA Controller Rotator + controller + 50 ft cable + 12V PSU + mounting hardware	1
02	Poynting EPNT-2 V3 4x4 MIMO directional antenna · connector cables + RJ45 adapters	1
03	Teltonika RUTM20 5G cellular router · interchangeable with any compatible model	1
04	Teltonika TAP400 Wi-Fi 6 access point · indoor backhaul to controller	1
05	TP-Link TL-PoE260S · Active PoE Injector 802.3af / 2.5G — powers the TAP400	1
06	GPOE-1-AB-48v60w · Passive PoE Injector 48V Mode A/B universal — jumpered Mode A for RUTM20	1
07	50 Ft. Outdoor Rated Cat 6 Ethernet Cable Copper Clad, Outdoor, UV Resistant, Direct Burial, Waterproof, Durable, 50 Foot (15.2 Meters), Black	1
08	Short Cat 6 patch ~3 ft indoor — LAN bridge between injectors	1
09	Ubiquiti ETH-SP-G2 · Surge Protector Installed at building penetration — protects indoor electronics	1
10	Grounding Kit Lug + 6 AWG conductor to ground bus	1
Pricing in USD. Does not include shipping, taxes, or installation. Quote valid 30 days from issue date. Cellular service plan, SIM activation, and Starlink subscription billed separately by carrier / Starlink.		CELLULAR PATH SUBTOTAL
10	Starlink Mini (Optional) Optional satellite path · customer-supplied / direct from Starlink	1